

BURST! POP-UP Instructions

HERE IS ANOTHER WAY

- 1.** Take frame out of bag.




- 2.** Look for label marked bottom and set up unit with adjustable feet on the floor.



- 3.** Stretch to open frame, and hook the "J" hooks together.



Close up of "J" hooks connected




- 4.** Attach graphic to frame with the Velcro (if graphic is not already applied). Make sure Velcro is fully engaged and smooth



View from Behind (2x2 shown)

(If you can't reach the top, try this)

- 1.** After frame is out of bag, start with frame feet on ground



- 2.** Stretch to open frame



- 3.** Hook the "J" hooks together, by pressing down



- 4.** Lift frame up and make sure Velcro is fully engaged and smooth



BURST!

GRAPHIC APPLICATION INSTRUCTIONS

To install a graphic to a BURST! display start by setting up the burst frame. Connect the "J" hooks extending from the hubs (A) of each quad. See figure. 1

Once the BURST! frame is set-up and all the "J" hooks are connected, spread your fabric graphic out. You will notice the front of the frame has a webbing with velcro (B) around the perimeter of the unit. The Graphic has the receptive velcro along the back of it's perimeter, the goal is to match the fabric up square with the frame.



figure. 2

Determine the bottom left corner of the graphic. Start with the bottom left corner as the frame rests on the ground webbing (front) up.



figure. 3

Work your way to the top left corner by attaching the fabric velcro to the webbing velcro in segments until you reach the top left corner. repeat at bottom to bottom right corner. Then attach top almost to the corner.



figure. 4

Work the right side up to almost the corner. stand unit up.



figure. 5

With your BURST! display upright, pull the corner to remove any slack in your graphic. Square up the corner and align the velcro on fabric graphic with velcro on unit.

figure. 1




View from Behind (2x2shown)

BURST! Light Kit Information






BURST! 2x3 with Lights

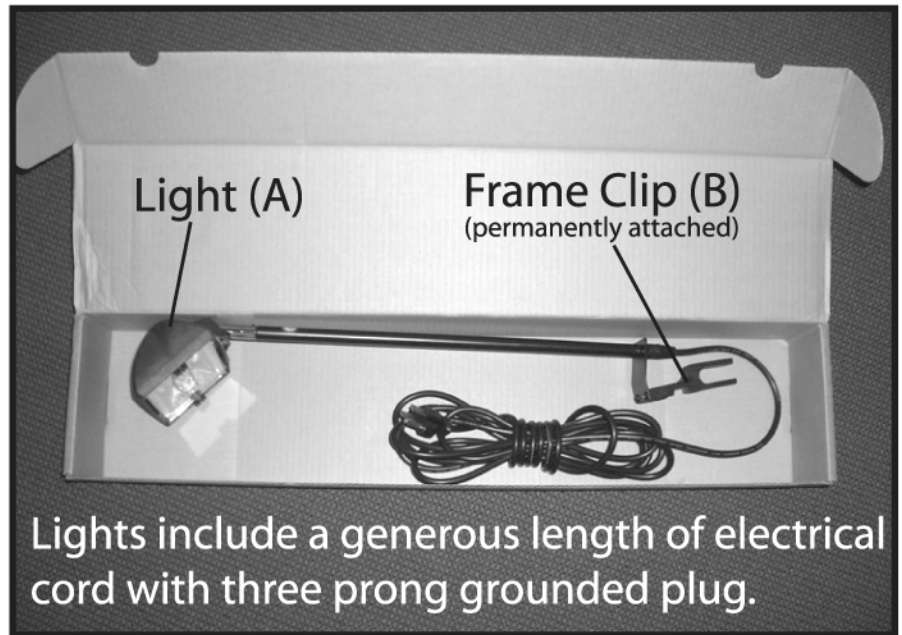

Lights include a generous length of electrical cord with three prong grounded plug.

NOTE: All BURST! frames are constructed of Quads. A 2x3 as shown at top left is 2 Quads wide by 3 Quads tall. Each top Quad can accept one light. A 3x3 BURST! accepts three lights across the top of the Frame. A BURST! 4x3 accepts four lights across the top of the frame. Lights do not link together electrically, each light requires a single outlet.

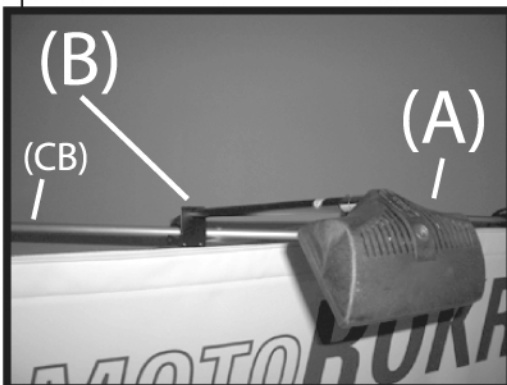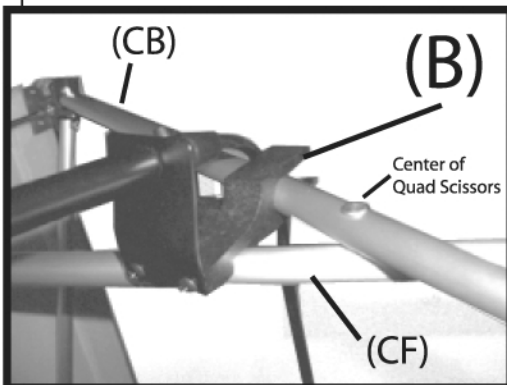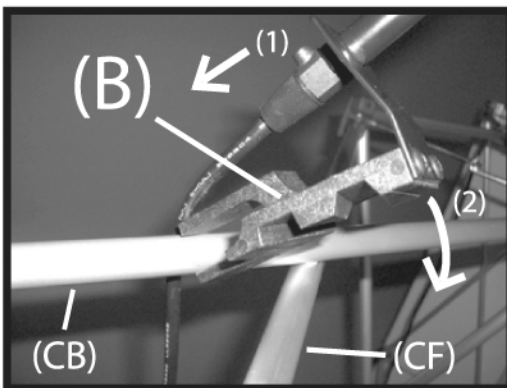

BURST Lights fit within the front (CF) and back (CB) Quad Scissors.

With A Focus on the Frame Clip (B) at left. Tip Light (A) back to slide the Frame Clip (B) Just left of Center of the BURST frame quad. The center of the Quad is where the two front (CF) and back (CB) scissors cross. The Frame Clip (B) is molded with a notch the allows the back scissor to fit within the Frame Clip (B). See Motion (1) at left. With the back scissor (CB) fitted within the Frame Clip (B) notch, gently lay the front of the Frame Clip (B) onto the front scissor bar (CF). See Motion (2).