



the easy to use - no tools required, graphic change-out system.

INSTRUCTIONS: We recommend 2 people to change the graphic.

The Pronto Change-O consists of 2 strips. One strip is attached to the bottom of the graphic. The other is attached to the leader in the base. (see below)

Fully extend the graphic to expose the leader - pulling approximately 5" past the Change-O strip. Have one person hold the top of the graphic tightly. (If a second person is not available, attach the hook at the top of the graphic securely to something stable.) The tension from the graphic can be a hazard if not securely held/attached.


Remove the locking pin from the bottom of the base and insert into the hole in the side of the base, to lock the graphic from being pulled back in. (see below)

Simply slide the current graphic off the Change-O strip, and slide the new graphic on.


Carefully secure the top of the newly attached graphic - preferably have someone hold it tightly - so you can remove the locking pin from the side and slowly feed the new graphic into the base.



The strip on the bottom of the graphic, slides off the strip attached to the leader. The replacement graphic slides on easily.



Close-up of the Change-O connection

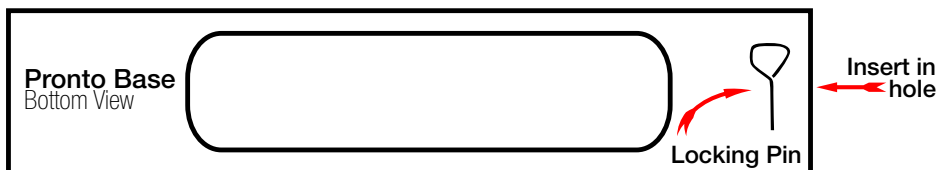

The locking pin is attached to the bottom of the base. To lock the graphic, remove the pin & insert in the hole on the side.