



scrolling banner systems

- 1 Top Horizontal Bar
- 2 Support Poles (connected by bungee cord)
- 3 Base
- 4 Base Cover Plate
- 5 Top Scrolling Bar
- 6 Bottom Scrolling Bar
- 7 Spring Adjustor (gray plastic tips on support poles)
- 8 Connection Channel
- 9 Feet
- 10 Hole for Support Poles




- Remove the Base Cover Plate and lift out the bottom scrolling bar (spring-loaded).
- Connect the support poles and insert into the holes in the base.
- Remove the top scrolling bar (spring loaded) from the top horizontal bar. (See pic. 1)



Pic 1

- Attach the top horizontal bar to the vertical support poles by inserting the gray spring adjustors into the rectangular slots on the bar. (See pic. 2)

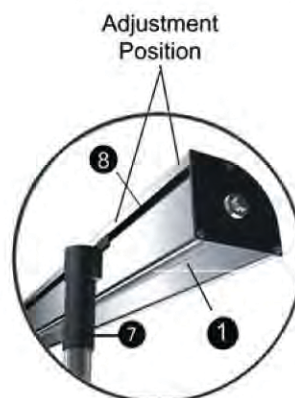

Pic 2

- Insert the bottom scrolling bar through the graphic.
- Attach the (spring loaded) bottom scrolling bar into the base. Note: the bottom scrolling bar has a "D" shape on one end only which matches with the motor shaft. To attach the bottom bar, first insert the end opposite the motor. Push in the spring plunger. Now attach the "D" shape onto the motor shaft.
- Insert the top scrolling bar through the graphic.
- While pressing down the spring adjustors, insert the top scrolling bar into the top horizontal bar. Then release the spring adjustors.
- Make sure the graphic is centered on the top and bottom scrolling bars. If the graphic is not centered, simply push down on the spring adjustors and center the graphic.
- Adjust the feet if necessary.
- Turn on/off switch to activate the scrolling action.