




Plan View



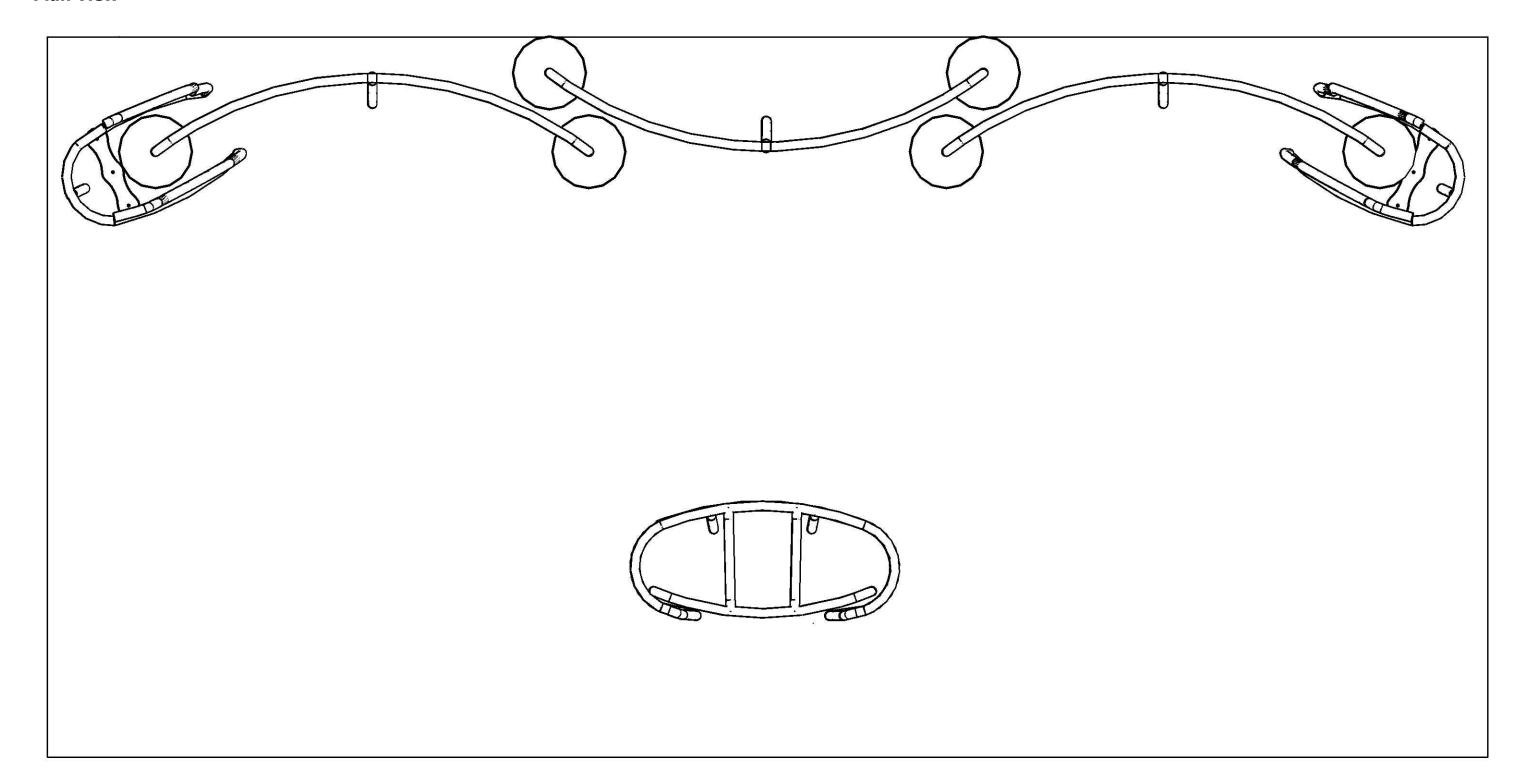


Using Your Setup Instructions

The Standing Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions before attempting to assemble your exhibit.


Connections are kept very simple: no tools. Everything assembles with push-button connectors and pre-connected horizontal sections.


Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

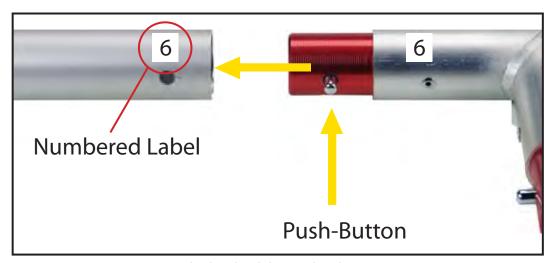

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

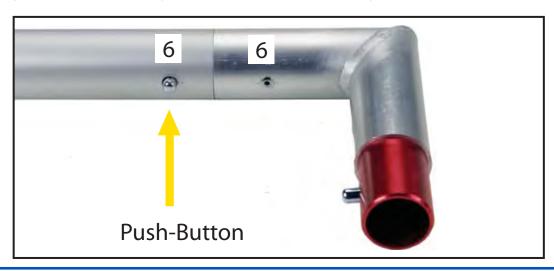

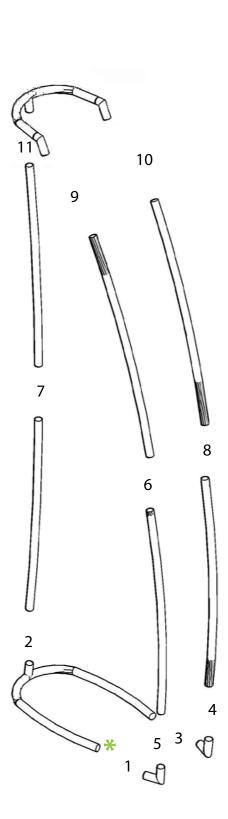



Steps:

- 1) Connect all pieces together in numerical order.
- 2) Install graphics.

© 2012



End-cap Graphic Installation Instructions



1. Apply velcro edges of blocker to velcro strips around the outside of the frame.



2. Be sure all velcro edges are secure and smooth.



3. After applying the blocker, slide the bottom opening over the top of the frame.



4. Slide the graphic down evenly to the bottom of the frame.



5. Connect zippers at the bottom front of the frame. Zip around bottom edge of frame.



6. Completed Graphic installation.




Using Your Setup Instructions

The Standing Sign Setup Instructions are created specifically for your configuration. They include exploded view of the frame which is sequentially numbered. We encourage you to study the insulation before attempting to assemble your exhibit.


Connections are kept very simple: no tools. Everything assembles with push-button connectors and pre-connected horizontal sections.


Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaner
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

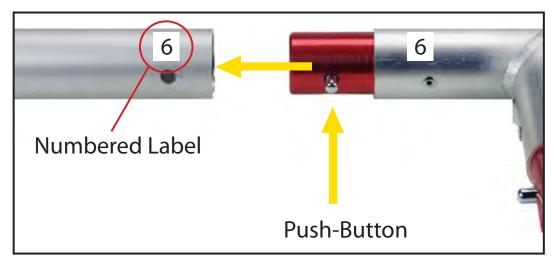

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

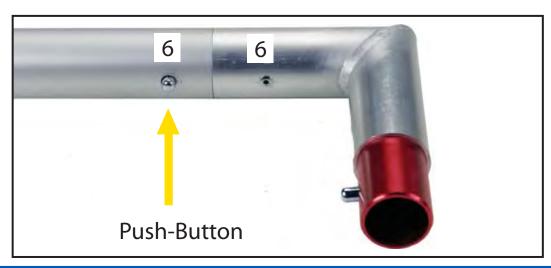

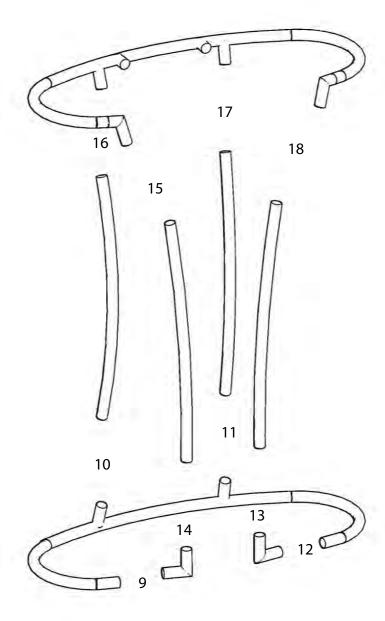

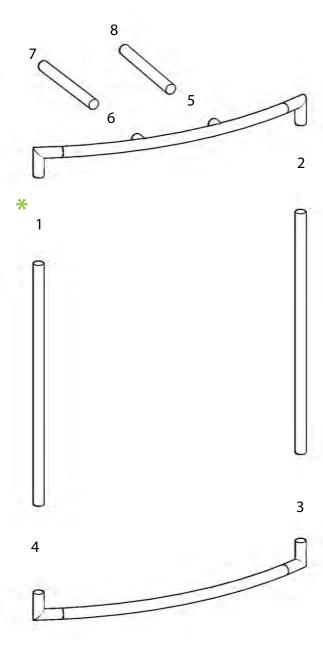

Steps:

- 1) Connect parts 1-6 together then 9-18.
- 2) Install pillowcase graphics on each frame.

NAVIGATOR STANDING FABRIC STRUCTURES

Counter Graphic Installation Instructions



1. Apply velcro edges of blocker to velcro strips around the outside of this frame only.



2. Be sure all velcro edges are secure and smooth.



3. After applying the blocker, slide the bottom opening over the top of the frame.



4. Align openings in top seam with the internal connecting posts.



5. Connect zippers at the bottom front of the frame.



6. Zip around bottom edge of frame.



7. Slide the graphic up evenly to the top of the counter front frame.



8. Connect zippers at the top back of the frame.



9. Place counter front inside main counter frame.



10. Align connecting posts on counter front frame with main counter and snap in place.



11. Completed Graphic installation.



12. Set counter top in place. Be sure that counter base is inside the counter top lip.

STANDING FABRIC STRUCTURES


Using Your Setup Instructions

The Standing Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions before attempting to assemble your exhibit.


Connections are kept very simple: no tools for frame, 7/32 allen wrench for base plates. Everything assembles with push-button connectors and pre-connected horizontal sections.


Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

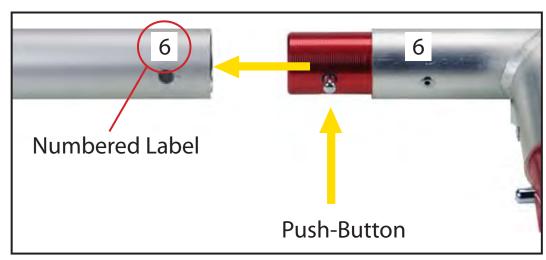

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

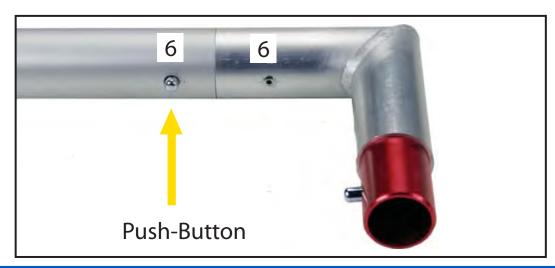



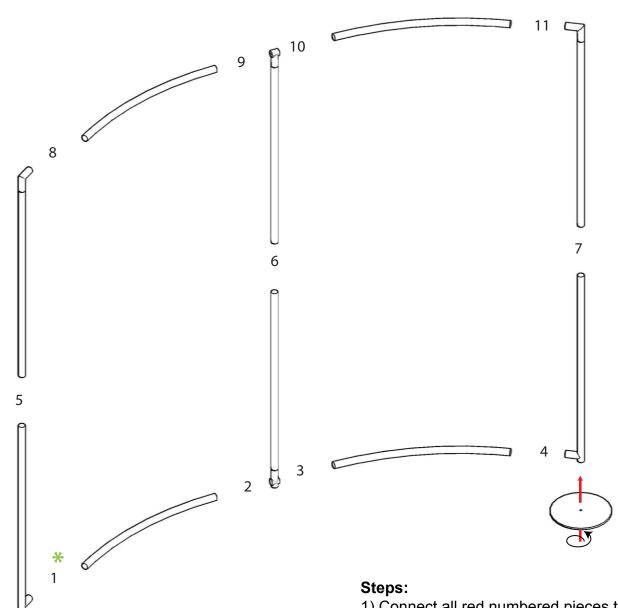

- 1) Connect all red numbered pieces together in numerical order.
- 2) Base plates connect into threaded end posts of frame.



Concave Graphic Installation Instructions



1. After assembling the frame unfold the graphic and slide the bottom opening over the top of the frame.



2. Slide the graphic down onto the frame.



3. Slide the graphic down evenly to the bottom of the frame.



4. Connect both zippers in the middle of the frame.



5. Zip both zippers starting from the middle to the outside of the frame.



6. Completed Graphic installation.