

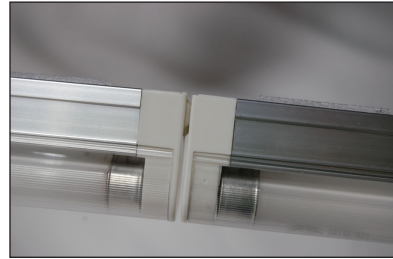


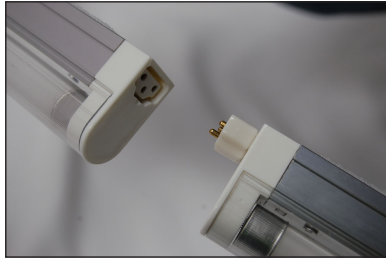


Set-Up Instructions


1. Set up the VBurst display and connect all the hooks.
2. Connect the male end to the female end of all three light bar sets.



3. Hang the hook end of all three light bar sets on the center of each top section. **Make sure light bars face the fabric back cover for best backlit quality.**
4. Drop light bar cords to the floor and away from the VBurst display to keep them out of the way and plug in the cords.



NOTE: →
Lights face the back of the display for better light diffusion.

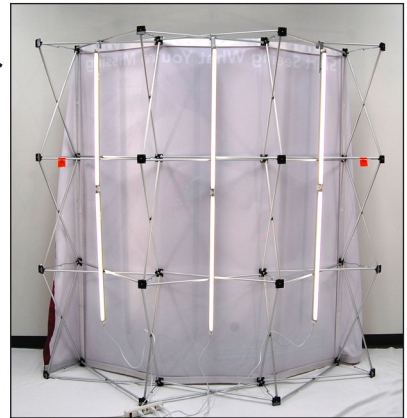

Hang light bars so the light faces the back cover.

5. Attach the fabric back cover by starting at the top of one end cap bracket and continue across the top to the other end cap bracket. Do the same for the bottom of the display. Complete the attachment of the fabric back cover by wrapping the rest of the fabric and attaching the velcro to all the endcap brackets on both ends.



6. Attach the front graphic endcap portion to the exposed velcro edge of the back cover on the end cap brackets to complete the front graphic attachment to the VBurst display.

